

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
12 February 2004 (12.02.2004)


PCT

(10) International Publication Number  
WO 2004/013691 A1

- (51) International Patent Classification<sup>7</sup>: G03B 42/04, A61B 6/14
- (74) Agent: HEDLUND, Alf; Patentkonsult Alf Hedlund AB, P.O. Box 171, S-931 22 Skellefteå (SE).
- (21) International Application Number: PCT/SE2003/001249
- (22) International Filing Date: 4 August 2003 (04.08.2003)
- (25) Filing Language: Swedish
- (26) Publication Language: English
- (30) Priority Data: SE 0202371-1 5 August 2002 (05.08.2002) SE
- (71) Applicant (for all designated States except US): JAN E WESTERLUND AB [SE/SE]; Skogvaktaregatan 4, S-461 33 Trollhättan (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): WESTERLUND, Jan [SE/SE]; Skogvaktaregatan 4, S-461 33 Trollhättan (SE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ARRANGEMENT RELATED TO A DENTAL SENSOR

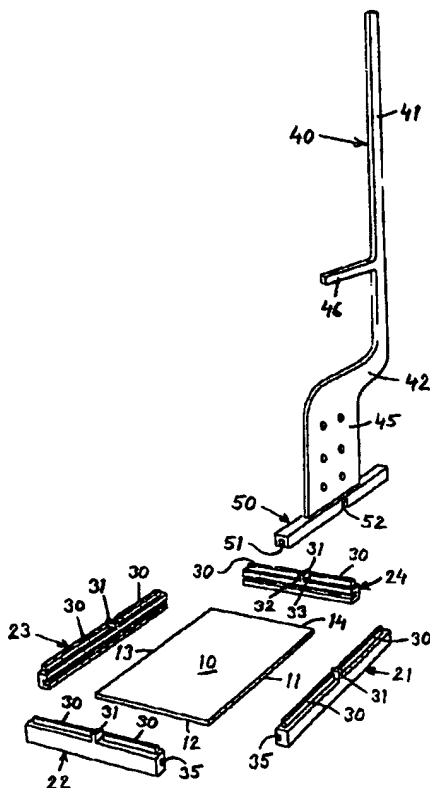

(57) Abstract: The present invention pertains to an arrangement relating to a sensor plate for dental X-ray or photographic purposes, wherein the plate (10;10';10'';10''') for example is of a digital or analogue type and is intended for one-time use or for many-times use. The sensor plate (10;10';10'';10''') includes or carries elements (30,31;30';31';61-64;80-82;90;95) that are intended for engagement with a plate holding element (40) in a number of different positions (A-F). The holding element (40) includes means (51,52;50) for engagement with engagement elements (30,31;30';31';61-64;80-82;90;95) of the sensor plate.

WO 2004/013691 A1

BEST AVAILABLE COPY

WO 2004/013691 A1



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**ARRANGEMENT RELATED TO A DENTAL SENSOR**

The present invention relates to an arrangement concerning a sensor plate for taking dental X-rays in accordance with the preamble of Claim 1. The invention also relates to a holder  
5 for positioning the sensor plate in dental X-ray operations.

Several different types of auxiliary devices are known in the art for holding or supporting a sensor plate or an X-ray plate/X-ray film in connection with dental X-ray operations. Such devices are based on the use of a square, flat sensor plate or X-ray film, wherein the  
10 auxiliary device includes different types of means for engagement with the plate/film such as to hold the sensor in the position desired when taking a dental X-ray. Alternative options are desired with regard to holding/supporting the plate/film depending on where the plate shall be placed in the oral cavity, i.e. depending on which tooth or which teeth that shall be examined and X-rayed.

15

The use of multi-use sensor plates has become more usual in the profession. The sensor plates are normally digital, although analogue plates are also conceivable. The term sensor plate as used in the present context shall therefore be understood as meaning an auxiliary device for presenting a translucent image or X-ray image that is normally presented  
20 electronically and saved in an appropriate manner.

An object of the present invention is to provide an extraordinarily attractive sensor plate arrangement of the above mentioned type, said object being achieved with the sensor plate and the arrangement defined in the characterising clauses of the claims.

25

The inventive sensor plate arrangement provides both technical and economical advantages.

According to the present invention, the sensor plate includes mutually separate elements  
30 for co-action with the holder in a number of mutually different ways, such as provide a large number of positioning options in the performance of dental examinations.

The present invention will now be described in more detail with reference to exemplifying embodiments thereof and also with reference to the accompanying drawings, in which

Figure 1 is a composite perspective view of an inventive arrangement, Figures 2-6 are respective perspective views of different embodiments of inventive sensor plates, and Figures 7 and 8 are respective side views of a further anchoring alternatives between holder elements and sensor plates.

5

Shown in Fig. 1 is a dental X-ray sensor plate 10 which may, of course, have any one of a number of designs that lie within the scope of applicable analogue and digital imaging techniques. Those cables that may be required for image transmission purposes have not been shown.

10

The sensor plate 10 of the Fig. 1 embodiment includes four side strips 21-24, each of which comprises two longitudinally extending guide strips 30 and a transverse guide strip 31. Openings 32 and 33 are disposed between the guide strips 30 and 31. The side strips 21-24 also include an opening or groove 35 which enables the side strips to be fitted to the side edges 11-14 of the sensor plate 10 prior to using said sensor plate. If desired, the side strips 21-24 can be integrated with the sensor plate 10 so as to form a one-piece structure.

15

Also shown in Fig. 1 is a holder element in the form of a pin 40 which is adapted to co-act with the side strip arrangement of sensor plate 10. The holder pin 40 includes a stem 41, a so-called biting pad or biting plate 45, and strip 50. The stem 41 is connected to the biting pad 45 via a junction 42. The strip 50 includes a longitudinally extending groove 51 and a transverse groove 52. The holder/holder pin 40 also includes an aligning pin 46 which is intended to function as an alignment assist in taking photographs or carrying out X-ray examinations.

25

In the performance of a dental X-ray, the sensor plate 10 carrying the side strips 21-24 can be fitted to the holder/holder pin 40 in two different ways. This is made possible by engagement of the longitudinal groove 51 with two mutually opposing guide strips 31 on the side strips 21 and 23 or on the side strips 22 and 24. The sensor plate 10 carrying the side strips 21-24 can also be fitted to the holder pin 40 in an additional four ways, by virtue of the engagement of the longitudinal groove 51 with the longitudinal guide strips 30 on one of the side trips 21-24, wherewith the transverse groove 52 receives the transverse strip 31. These assembly options mean that the holder pin 40 can be fitted to the sensor plate 10 in any one of six different ways, thereby enabling the sensor plate to be orientated

30

as desired in the patient's mouth in connection with a dental X-ray. The patient can assist in the fixation of the sensor plate 10 in its desired position, by biting on the biting plate or pad 45. The alignment pin 46 functions to assist in the alignment of the radiation source used in the X-ray process or the photographic process concerned.

5

Figure 2 shows the sensor plate 10 with the side strips 21-24 attached thereto.

Figures 3-5 illustrate examples of alternative embodiments of inventive sensor plates.

- 10 In the case of the sensor plate 10' shown in Fig. 3, the longitudinal strips 30' and the transverse strips 31' are integral with the sensor plate 10' and therewith fixed parts thereof.

In the case of the sensor plate 10'' shown in Fig. 4, the plate carries wire-like side elements 61-64 that are adapted for co-action with the grooves 51 and 52 in the holder 40.

15

In the case of the sensor plate 10''' shown in Fig. 5, the plate includes openings 71-78 or grooves that provide the necessary holder engagement or connection means 80-82, said means 80-82 engaging the longitudinal groove 51 in the holder 40.

- 20 It will be noted that the embodiments shown in Figs 3-5 also provide six different options in fitting the sensor plate to the holder 40.

The optional possibilities of fitting the holder to the sensor plate 10 in accordance with the invention are shown in chain lines A-F in Fig. 6.

25

Figure 7 illustrates alternative means of securing the holder 40 to the sensor plate 10. In this case, the holding strip 50 fits essentially shape-wise into a groove 90 in the sensor plate, wherein the plate 10 will preferably include a groove pattern according to the lines A-F in Fig. 6. The plate holding strip 50 is thus inserted into an appropriate groove 90, in  
30 the performance of a dental examination.

Figure 8 illustrates a further alternative securing of the holder 40 to the sensor plate 10, where the holding strip 50 fits essentially shape-wise into a groove 95 in the sensor plate, wherein the sensor plate 10 preferably include a groove pattern according to the lines A-F

in Fig. 6. The plate holding strip 50 is thus inserted into an appropriate groove 95, in the performance of a dental examination.

5 It will be understood that many options are available with regard to the design of the inventive sensor plate for co-action with the holder. It will thus be understood that both the sensor plate and the plate holder can be modified in many different ways within the concept of the invention. An essential feature, however, is that the sensor plate carries means for connecting the plate to a holder pin or to a holding element, said means being either fixed or detachable.

10

It will further be noted that the holding pin and the side strips may be made of any appropriate material, such as a plastic material as a non-limiting example. Moreover, the sensor plate and its inventive side surface or edge arrangement and/or its arrangement of openings may be covered with a replaceable protective casing of a one-time nature or of a nature that enables the sensor plate to be used a few times while maintaining the necessary level of hygiene with regard to dental examinations. The holding pin may be of a one-time nature or may be reusable many times, depending on the material from which it is made and also on available possibilities for sterilisation or disinfection.

15

20 When the sensor plate engagement elements are removable, these elements can also be made from a material that can be sterilised or disinfected effectively. If so wished, the sensor plate, inclusive of the engagement means, can be designed to enable the same to be sterilised and disinfected effectively.

25 If the holder 40 is intended for one-time use only, the holder will preferably be dimensioned to hold the plate in respect of all exposures required with regard to one and the same patient in the process of a dental examination.

30 It will be noted that in the case of a simplified embodiment of the invention, the sensor plate may be adapted to engage the holder in three different positions, for instance in the positions A,C,E or B,D,F or in other positional combinations. This is achieved by reducing the number of engagement elements on the sensor plate. Thus an essential feature of the invention is that the sensor plate includes, carries or is equipped with elements that can engage a plate holding element in at least three different positions, preferably in six

different positions. If so wished, the sensor plate may, of course, be designed to engage a plate holding element in four or five different positions, by the above mentioned reduction in the number of engagement elements on the sensor plate.

- 5 It will of course be understood that design modifications are possible within the framework of the inventive concept. The outer configuration of the sensor plate and the design of the plate holding element may, of course, be varied.

- 10 Many variations are possible within the scope of the invention, with regard to the detail arrangement of the openings in the sensor plate and/or supplementary arrangements, wherewith the design of the plate holding element can also be adapted for desired or necessary positioning co-action.

- 15 It will therefore be understood that the present invention is not limited to the described and illustrated embodiments thereof and that changes and modifications are possible within the scope of the accompanying claims.
-

**CLAIMS**

1. An arrangement relating to a sensor plate for dental X-raying purposes, wherein the sensor plate (10;10';10'';10''') for example is of a digital or analogue type and is intended for one-time use or for many-times use, characterised in that the sensor plate (10;10';10'';10''') includes or carries elements (30,31;30',31';61-64;80-82;90;95) that are intended for engagement with a plate holding element (40) in at least three different positions (A-F).
2. An arrangement according to Claim 1, characterised in that the engagement elements (30,31) of the sensor plate are arranged at side elements (21-24).
3. An arrangement according to Claim 1 or 2, characterised in that the engagement elements (30,31) are detachable from the sensor plate (10).
4. An arrangement according to Claim 1 or 2, characterised in that the engagement elements (30',31';61-64;80-82;90;95) are fixed on the sensor plate (10';10'';10''').
5. An arrangement according to Claim 1, characterised in that the engagement elements include openings (71-78;90;95) in the sensor plate (10''').
6. An arrangement according to Claim 1, characterised in that the engagement elements comprise wire-like elements (61-64).
7. An arrangement according to any one of Claims 1-6, characterised in that the plate holding element (40) includes grooves (51,52) for engagement with the sensor plate engagement elements (30,31;30',31';61-64;80-82).
8. An arrangement according to any one of Claims 1-7, characterised in that the plate holding element (40) includes a biting plate (45).
9. An arrangement according to any one of Claims 1-8, characterised in that the plate holding element (40) includes a holding pin (41) and an alignment assisting element (46).




10. An arrangement according to any one of Claims 1-9, characterised in that the sensor plate (10;10';10'';10''') is adapted to engage the holding element (40) in six different positions (A-F).



---

$\frac{1}{4}$ 

FIG. 1

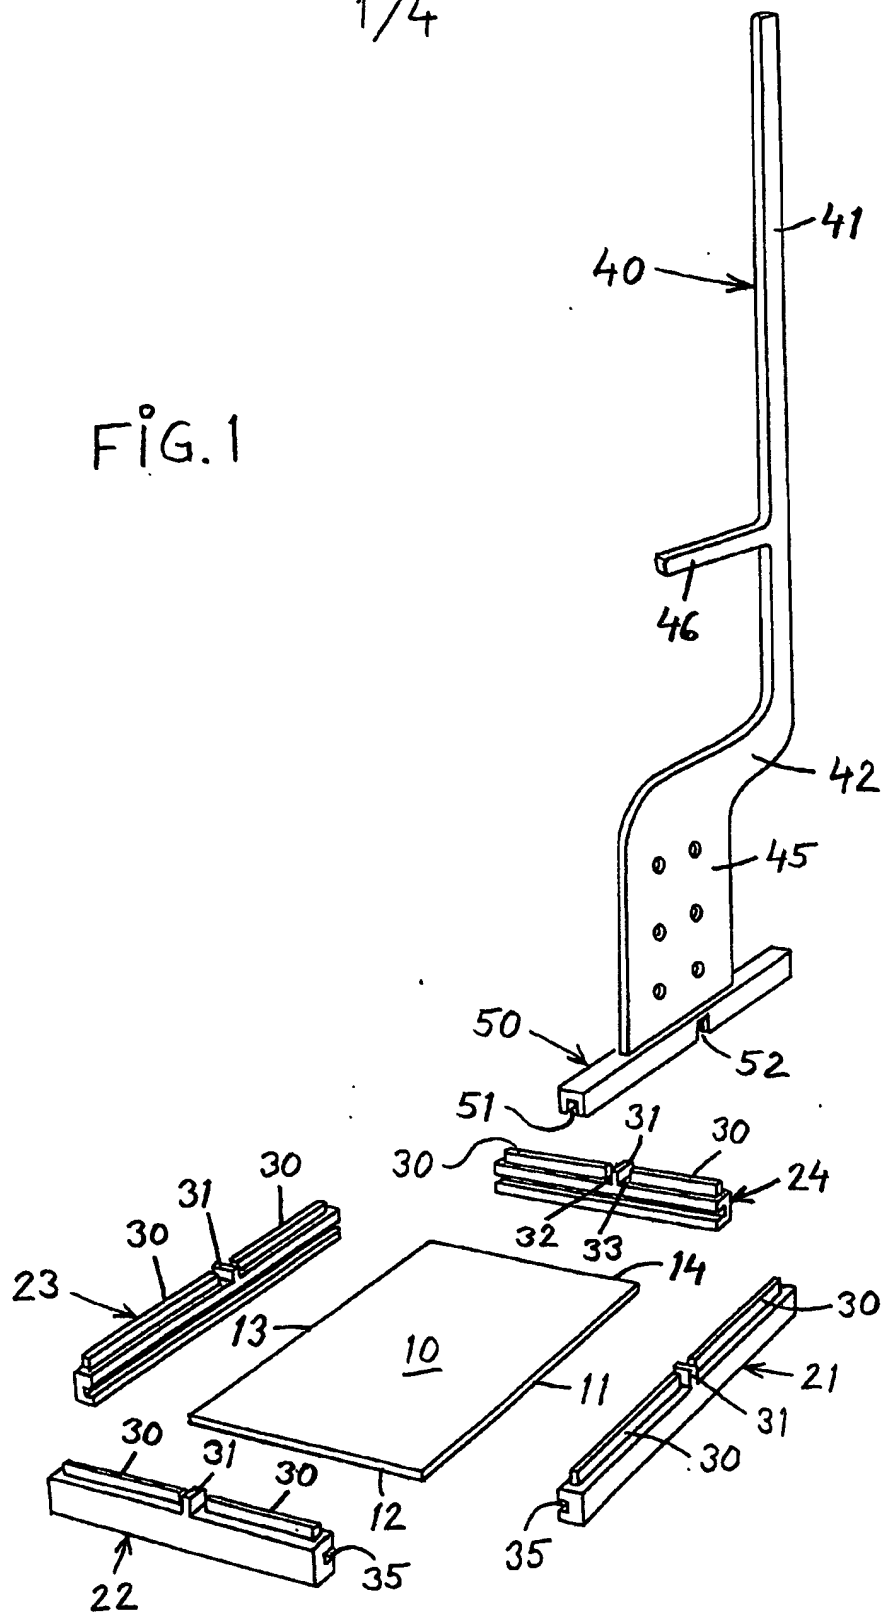

2/4

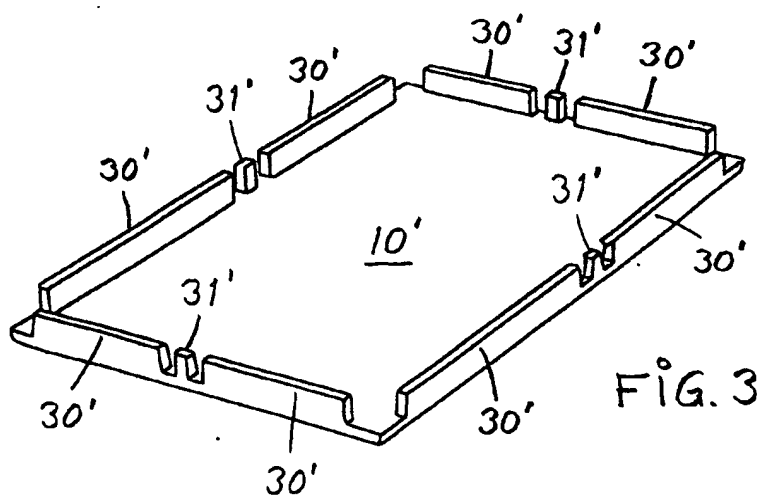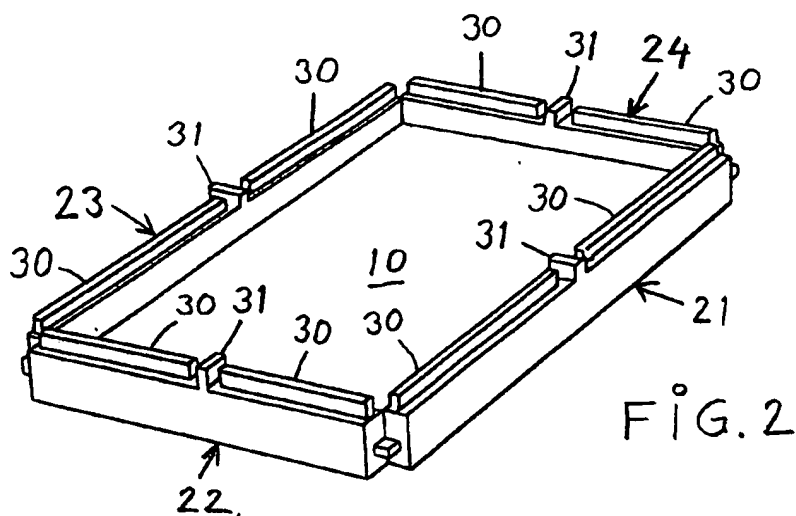

$\frac{3}{4}$ 

4/4

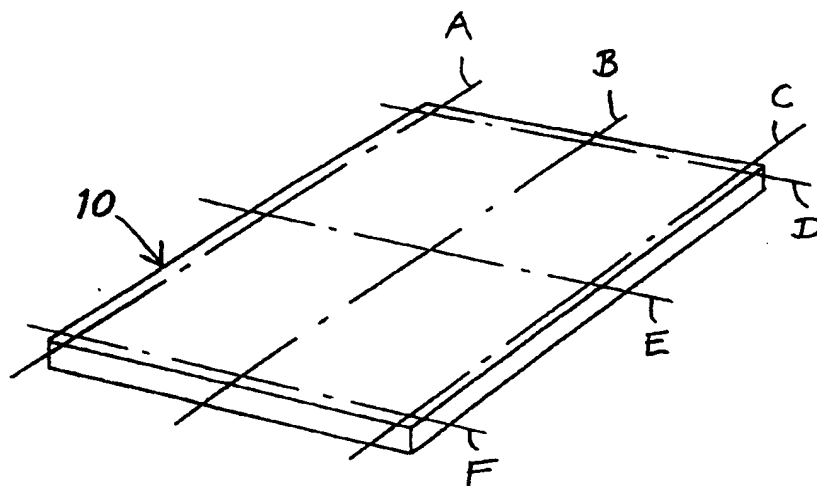


FIG. 6

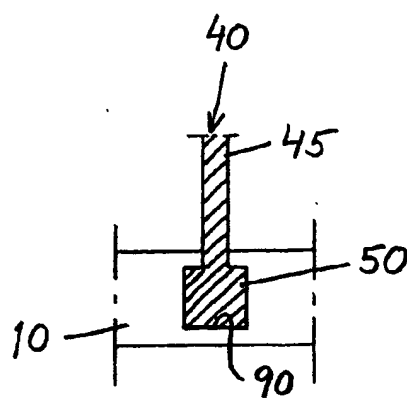


FIG. 7

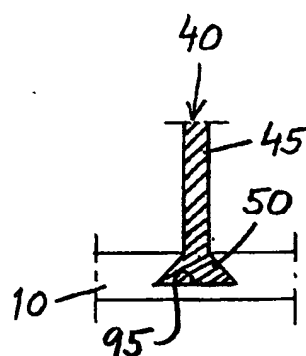


FIG. 8

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/01249

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: G03B 42/04, A61B 6/14

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: A61B, G03B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4365162 A (JARBY, S.), 21 December 1982 (21.12.82), column 4, line 30 - line 49, figures 1, 6, abstract	1,3,7-10
A	--	2,4-6
A	US 5289522 A (KANBAR, M.S. ET AL), 22 February 1994 (22.02.94), the whole document	1-10
A	US 4507798 A (WELANDER, U.E.S.), 26 March 1985 (26.03.85), column 2, line 24 - column 3, line 49, figures 1,4, abstract	1-10
	-----	

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

14 October 2003

Date of mailing of the international search report

16-10-2003

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Anna Malmberg /OGU  
Telephone No. +46 8 782 25 00

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/01249

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	4365162	A	21/12/82	CH	639263 A	15/11/83
				DE	3006608 A	11/09/80
				GB	2048030 A,B	03/12/80
				JP	55137521 A	27/10/80
				SE	436942 B,C	28/01/85
				SE	8001715 A	10/09/80
-----						
US	5289522	A	22/02/94	NONE		
-----						
US	4507798	A	26/03/85	AT	21327 T	15/08/86
				DE	3272601 D	00/00/00
				EP	0078425 A,B	11/05/83
				SE	453047 B,C	11/01/88
				SE	8106534 A	05/05/83
-----						

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**